

Mobile · Orders & delivery

Offline prototype sample, revision r12. Machine-translation demonstration, not approved. Diagram labels retain the source language.

1. Overview & Boundary Specifications

This example shows how the mobile app reads order and delivery progress. All endpoints and workflows are demonstration data, not verified production behavior. The dev branch is the source baseline, not deployment evidence.

2. Demonstration Interface Contracts

Mock interface endpoints are categorized under the /example/ namespace to emphasize prototype boundaries.

Endpoint Path	Method	Description (Demonstration)	Status
/example/orders/create	POST	Submit an order; example only.	200 OK
/example/orders/status	GET	Read order and delivery progress.	200 OK
/example/delivery/dispatch	POST	Submit a delivery request; example only.	202 Accepted

3. System interaction

In this example, the app reads delivery progress from the backend. Actual handoff steps, statuses and retry policies require code and integration evidence.

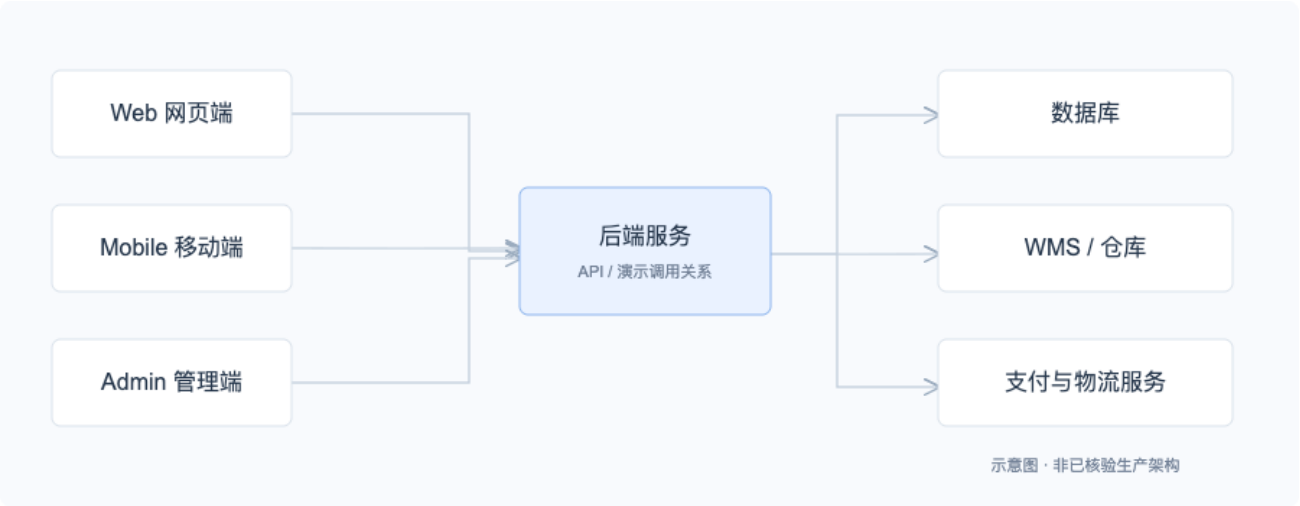


Diagram retained in its original language; illustration only.

4. Sources & evidence

DEMO-SNAPSHOT-12 is a sample identifier, not a real commit. Deployment evidence has not been provided.